SPECIFICATION SHEET

EMPACHER

customer : **nation:** **date:**
phone :
fax :
e-mail : **signature of customer:**

requestet date of delivery:

typ of boat: **mould no.:**

crew weight (average): ....kg

coxswain: ☐ sitting in stern (four, eight)
☐ lying in bow (pair, four)

section: yes / no (seat no. 6 / 7)

lenght of tracks: (track without stoppers)
standard = 83cm
other lenght:.....

rigging:

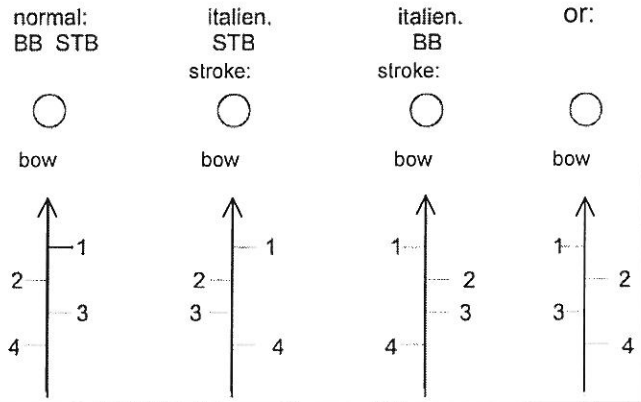

sliding seat ☐ Cedar wood
☐ Carbon with holes
☐ with holes
☐ without holes
☐ standard height
☐ medium (5mm lower)
☐ low (10mm lower)
☐ hight (5mm higher)
☐ extra high (10mm higher)

gates: Emp. Insertgates: ☐
other:..... .....

sketch for outrigger dimensions:

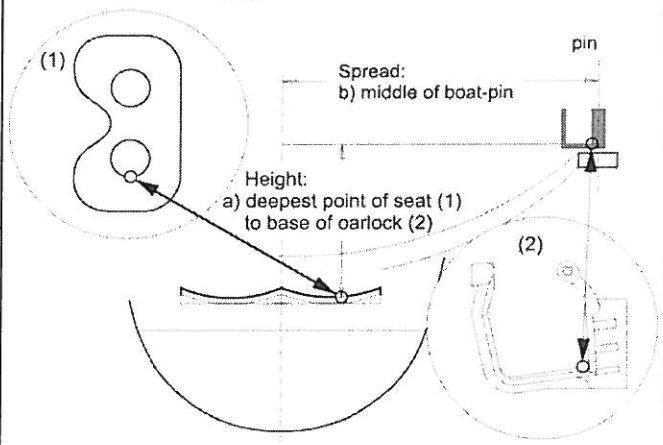

outrigger dimensions (s. sketch):
Oarlock set in middle position
(K-type rigger in height twice adjustable with 1cm)

	scull	**sweep**
a) height starboard (left hand):	.....cm	.....cm
height portside (right hand):	.....cm	
b) spread	.....cm	.....cm

optinals:
☐ round carbon profiles at canvas
☐ carbon fin / carbon fin rudder
☐ steering device integrated inside canvas
☐ Textremdecks
☐ Olympia Edition
Textremdecks and carbon layer inside
(can be aloaed only with round carbon profiles at canvas)

steering shoe ☐ right food
seat no.:..... ☐ left food

shoe sizes: (English sizes)

seat no.:	
1 =	5 =
2 =	6 =
3 =	7 =
4 =	8 =

remarks / special requests:

electr, system:
☐ wiring only
☐ complete
☐ cox cox
☐ speedcoach →
☐ strokecoach
☐ GPS
☐ standard
☐ XL1, 2, 3, 4

boatcover: ☐ cotton
☐ polyamide partly padded
☐ polyamide fully padded

cover for outrigger: qty.:.....